




Cat Switchgear Test Certificate of Seismic Withstand Capability

Cat Paralleling Switchgear identified below was tested for seismic withstand capability and tested in accordance with the combined requirements in the International Building Code, California Building Code and the Uniform Building Code. As required by the codes, the equipment demonstrated its ability to function after the seismic tests. The seismic capability of the equipment exceeds the worst-case required levels, as illustrated in the figure below.

Metal-Enclosed Low Voltage Paralleling Switchgear and Deadfront Switchboards with Magnum DS, SB or NRX Breakers equipped with Cat Generator Control Systems Based on PLC Automation or EMCP3.S Controller Technology

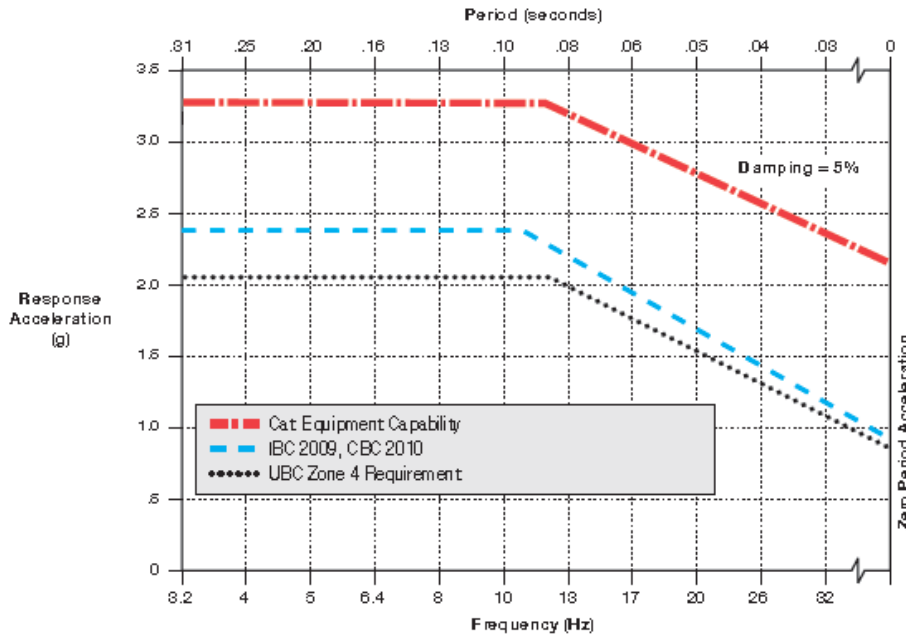

The frequency sweep tests revealed that the lowest equipment natural frequency is:

6.2 Hz

Nathan Glenn, PE
Westinghouse Electric Company, LLC

Nathan Glenn
3RD PARTY TEST ENGINEER IN CHARGE

TESTED BY
Wyle Laboratories
September, 2008 – 55906R08-5B

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.